

Data sheet

Vacupor® NT

ENGLISH

Metric information - Page 2

Description

Vacupor® NT is a microporous insulation material which has an extremely low thermal conductivity coefficient giving it very good insulating properties.

Vacupor® NT consists of inorganic oxides. The main constituent is fumed silica, the other components are opacifiers for minimizing infrared radiation, and silicates. Vacupor® NT (core material) is not flammable and meets the requirements of IMO FTPC part I and DIN ISO 4102 part I, A1.

Vacupor® NT is heat sealed under vacuum in a multilayer vacuum metalised film. The very low internal pressure and the microporous panel core enable it to reach extremely low thermal conductivity values.

Application

Vacupor® NT was specially developed for applications in vacuum insulation technology. The low density and the specially developed IR opacifiers contained in these grades greatly reduce the thermal conductivity of Vacupor® NT Systems.

Typical applications

Vacupor® NT is also successfully used as insulation material in the following areas:

- Domestic appliances (refrigerator and freezer cabinets)
- Absorption refrigerators
- Cryogenic freezer
- Temperature controlled packaging
- Transport boxes
- Facade elements
- Terrace insulation
- Cold storage floor insulation
- Tank container insulation

Form of delivery

Standard sizes:

- 600 mm x 250 mm
- 600 mm x 500 mm
- 1000 mm x 300 mm
- 1000 mm x 600 mm
- 1200 mm x 500 mm
- 1200 mm x 1000 mm

Standard thicknesses:

- 10, 15, 20, 25, 30 mm
- Further thicknesses on request

Special formats available on request

Restrictions on applications


The metallized, multilayer plastic film of the Vacupor® NT must not be damaged by drilling, cutting, milling, nailing, otherwise the internal pressure of the panel will rise and the special properties of the panel will be lost.

Shelf life

Vacupor® NT has a very long shelf life. Please refer to our pressure rise table: Thermal conductivity as a function of interior pressure.

Safety directions

Vacupor® NT is not a hazardous substance according to the EU directive 2006/1907/EEC. Please also see our Safety Data Sheet. Vacupor® NT does not use any dangerous decomposition products and according to current knowledge, it does not cause any problems to human health or the environment.

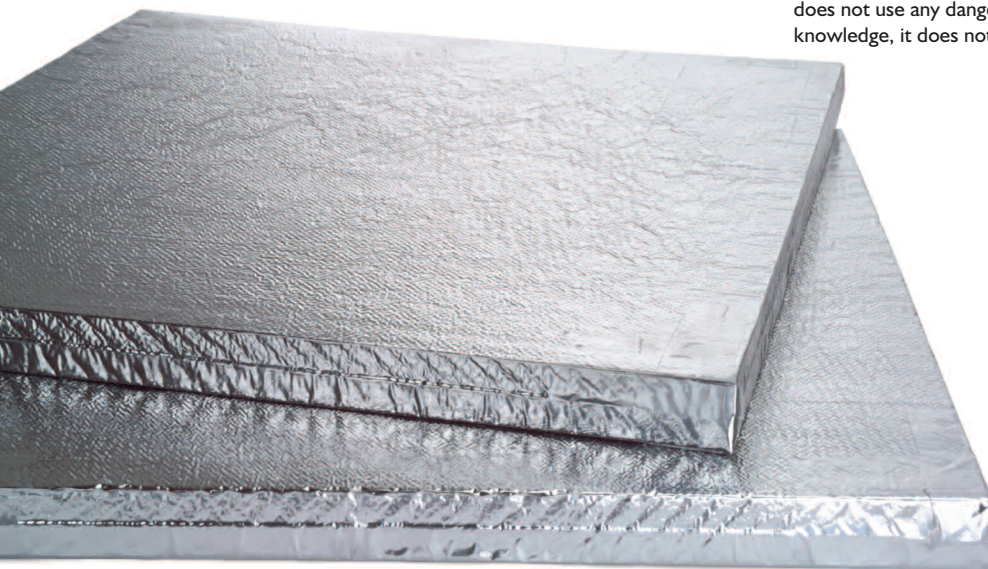

Data sheet

Vacupor® NT

Metric information

Contact

Physical Properties	
Colour	Silver
Density (kg/m ³) ⁽¹⁾	150 - 300
Thermal Conductivity at mean temperature of 22.5°C (W/m·K)	
@ 1 mbar ⁽²⁾	≤0.005
@ ambient pressure	≤0.019
Temperature Resistance (°C) ⁽³⁾	-50 < T < 120
Maximum Film Projection (mm)	100
Interior Pressure (mbar)	≤5
Theoretical Pressure Rise (mbar)	0.5
Maximum Panel Dimensions	
Length (mm)	150 - 2200
Width (mm)	150 - 1000
Thickness (mm)	10 - 50
Length Tolerances (mm)	
0 to 500	+ 1.0 / -2.0
501 to 1000	+ 1.0 / -4.0
> 1000	+ 1.0 / -6.0
Thickness Tolerances (mm)	
<20	± 1.0
20 to 30	+ 1.0 / -2.0
>30	+ 1.0 / -3.0
Thermal Shock Resistance	Vacupor® NT (core material) is insensitive to high and low temperature thermal shocks

Europe:

Telephone:
+44 (0) 151 334 4030

E-mail:
marketing.tc@morganplc.com

North America:

Telephone:
+1 (706) 796 4200

E-mail:
northamerica.tc@morganplc.com

South America:

Telephone:
+54 (11) 4373 4439

E-mail:
marketing.tc@morganplc.com

Asia:

Telephone:
+65 6595 0000

E-mail:
asia.mc@morganplc.com

Porextherm:

Porextherm
Dämmstoffe GmbH
Heisinger Straße 8/10
D-87437 Kempten

Telephone:
+ 49 (0)831 - 575360
Fax:
+ 49 (0)831 - 575363

Please note:

Vacupor® NT is not approved by the German building and construction authorities for building applications. Vacupor® NT may just be applied in areas where a Vacuum Insulation Panel is treated as an unregulated construction product, if an admission on a single case exists or will be obtained. The thermal conductivity value just describes the value of the Vacuum Insulation Panel under the mentioned conditions, measured in the center of the panel. The measured value does explicitly not correspond with the rated value, determined by the DIBt and may not be used in Germany for the implementation of thermal calculations for buildings.

- (1) Dependent on board thickness
- (2) Dependent on the panel-size and -thickness, internal pressure can be between 0.5 – 5 mbar. The standard internal pressure in the evacuation chamber is < 0.5 mbar.
- (3) The limits are fixed by the barrier film (sealing material) used; constant load: ≤80°C (176°F); short load time with 120°C (248°F): roughly 30 minutes.

Thermal conductivity

Thermal Conductivity as a function of internal pressure.

Gas Pressure (hPa)	U value (W/m ² K)	λ (10 ⁻³ W/m·K)
< 10-3	0.187	3.63
0.1	0.188	3.66
1.0	0.193	3.75
10	0.219	4.25
150	0.448	8.70
1000	0.943	18.30

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.


Whilst the values and application information in this datasheet are typical, they are given for guidance only. The values and the information given are subject to normal manufacturing variation and may be subject to change without notice. Morgan Advanced Materials - Thermal Ceramics makes no guarantees and gives no warranties about the suitability of a product and you should seek advice to confirm the product's suitability for use with Morgan Advanced Materials - Thermal Ceramics.

Morgan Advanced Materials plc Registered in England & Wales at Quadrant, 55-57 High Street, Windsor, Berkshire SL4 1LP UK Company No. 286773


Data sheet

Vacupor® NT


Thermal Conductivity as a function of internal pressure (DIN 52612)

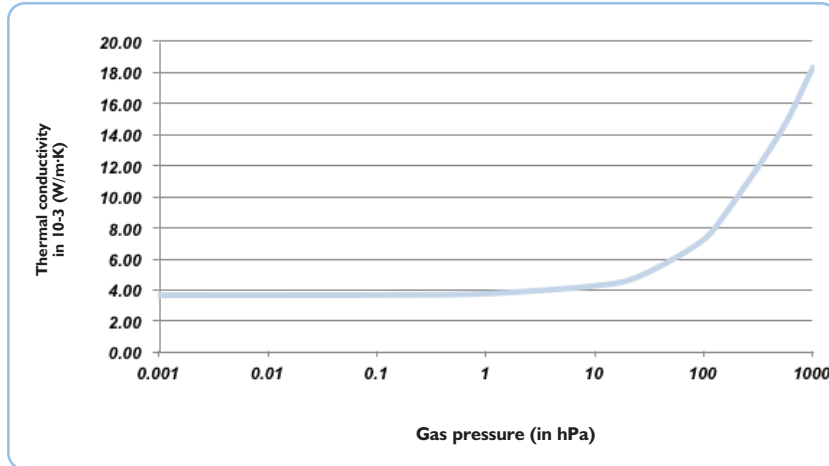


Thermal Conductivity (Panel Core) DIN 52612

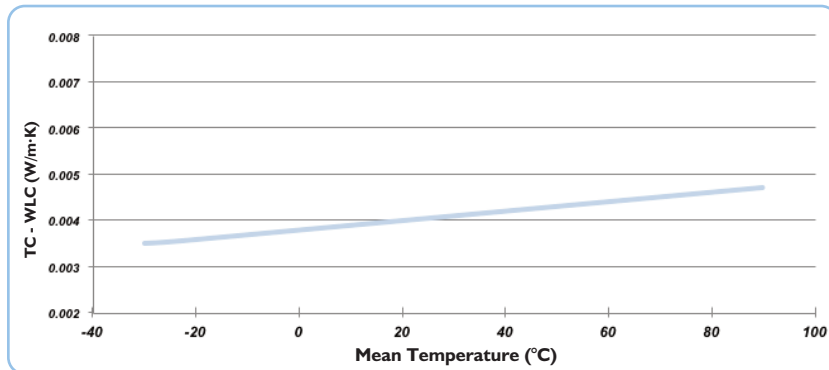

Compression Behaviour (Panel Core)

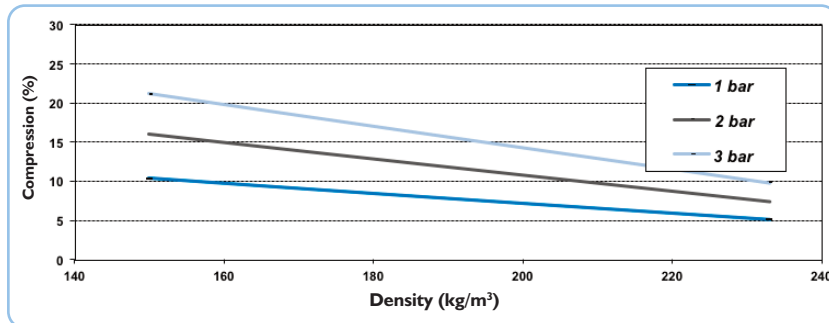

Low-temp. Compression Strength

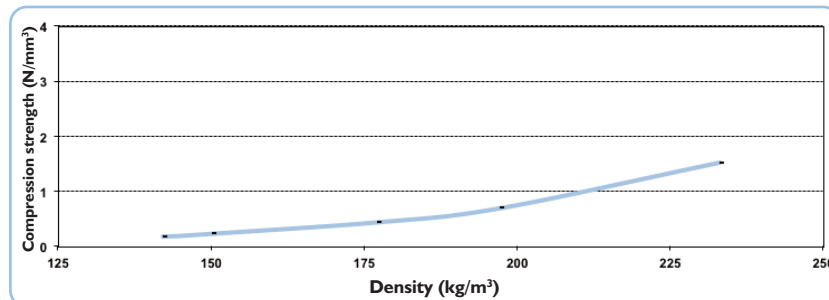

Contact

Europe:

Telephone:
+44 (0) 151 334 4030

E-mail:
marketing.tc@morganplc.com

North America:

Telephone:
+1 (706) 796 4200

E-mail:
northamerica.tc@morganplc.com

South America:

Telephone:
+54 (11) 4373 4439

E-mail:
marketing.tc@morganplc.com

Asia:

Telephone:
+65 6595 0000

E-mail:
asia.mc@morganplc.com

Porextherm:

Porextherm
Dämmstoffe GmbH
Heisinger Straße 8/10
D-87437 Kempten

Telephone:
+ 49 (0)831 - 575360
Fax:
+ 49 (0)831 - 575363

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.

Whilst the values and application information in this datasheet are typical, they are given for guidance only. The values and the information given are subject to normal manufacturing variation and may be subject to change without notice. Morgan Advanced Materials - Thermal Ceramics makes no guarantees and gives no warranties about the suitability of a product and you should seek advice to confirm the product's suitability for use with Morgan Advanced Materials - Thermal Ceramics.

Morgan Advanced Materials plc Registered in England & Wales at Quadrant, 55-57 High Street, Windsor, Berkshire SL4 1LP UK Company No. 286773